

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 680 108 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**08.12.1999 Bulletin 1999/49**

(51) Int Cl.<sup>6</sup>: **H01P 1/213**

(21) Application number: **95302705.9**

(22) Date of filing: **24.04.1995**

(54) **Duplexer**

Duplexer

Duplexeur

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **26.04.1994 JP 8852494**

(43) Date of publication of application:  
**02.11.1995 Bulletin 1995/44**

(73) Proprietor: **MURATA MANUFACTURING CO. LTD.**  
**Nagaokakyo-Shi, Kyoto 617 (JP)**

(72) Inventor: **Atokawa, Masayuki c/o Murata**  
**Manufacturing Co.Ltd**  
**Nagaokakyo-shi, Kyoto-fu (JP)**

(74) Representative: **Hillier, Peter et al**  
**Reginald W. Barker & Co.,**  
**Chancery House,**  
**53-64, Chancery Lane**  
**London, WC2A 1QU (GB)**

(56) References cited:

**GB-A- 2 282 029**

**US-A- 5 023 866**

- **PATENT ABSTRACTS OF JAPAN vol. 4 no. 189**  
**(E-39) [671] 25 December 1980 & JP-A-55 132103**  
**(SHIMADA RIKI KOGYO K.K.) 14 October 1980**
- **PATENT ABSTRACTS OF JAPAN vol. 17, no. 128**  
**(E-1333) 18 March 1993 & JP-A-04 304003**  
**(MURATA MFG CO LTD) 27 October 1992**
- **PATENT ABSTRACTS OF JAPAN vol. 15, no. 219**  
**(E-1074) 05 June 1991 & JP-A-03 062626 (NEC**  
**CORP) 18 March 1991**
- **PATENT ABSTRACTS OF JAPAN vol. 11 no. 51**  
**(E-480) [2498] 17 February 1987 & JP-A-61**  
**214625 (TOKYO ELECTRIC CO LTD) 24**  
**September 1986**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 680 108 B1**

## Description

### Background of the Invention

[0001] This invention relates to a duplexer, usable in a mobile communication apparatus such as a car phone and a portable phone, for allowing a single antenna to be used for both transmission and reception of signals.

[0002] There is a trend for compactness and high-density mounting in mobile communication apparatus such as portable telephones, and the progress is in the direction of digital systems. Under these circumstances, there are increased demands for compactness and high-density mounting for the components which are used in such apparatus.

[0003] An antenna circuit for an apparatus such as a portable telephone is generally structured, as shown in Fig. 4, by connecting an isolator ISO to a duplexer, the duplexer being composed of a transmission filter and a reception filter and the isolator being connected to the input terminal of its transmission section. Fig. 5 shows a circuit diagram of a duplexer for a prior art mobile communication apparatus such as a portable analog telephone using dielectric resonators. Its transmission section comprises a band elimination filter using two dielectric resonators  $R_1$  and  $R_2$  as well as capacitors  $C_1 - C_5$  and inductors  $L_1$  and  $L_3$ , and its reception section comprises a two-stage bandpass filter using two dielectric resonators  $R_3$  and  $R_4$  as well as capacitors  $C_6 - C_8$ . An antenna terminal ANT in the middle is connected to an antenna. The inductor  $L_1$  and the capacitors  $C_1$  and  $C_2$  together form a  $\Pi$ -type low-pass filter adapted to adjust the phase at the antenna terminal ANT of the band elimination filter such that the impedance becomes an open circuit in the pass band of the bandpass filter in the reception section. The dielectric resonators  $R_1 - R_4$ , capacitors  $C_1 - C_8$  and inductors  $L_1 - L_3$  are mounted on a single substrate to form a duplexer of a unified structure and, when it is used in an apparatus such as a portable telephone, such a duplexer and an isolator are mounted separately on a circuit board.

[0004] Thus, a prior art duplexer has a transmission section having a filtering function with large attenuation in the pass band of the reception section, and use is therefore made of a dielectric filter with large attenuation comprising a plurality of dielectric resonators. Thus, many dielectric resonators, capacitance-providing elements and inductance-providing elements such as coils were required. This makes it difficult to provide a compact duplexer, and since these many elements must be properly arranged and soldered, not only the cost of components but the cost of production is increased. Moreover, such a prior art duplexer has the problem of a large insertion loss.

### Summary of the Invention

[0005] It is therefore an object of this invention to elim-

inate the problems as described above of prior art duplexers and to provide an improved duplexer with a small loss, which is composed of an isolator and a fewer components, can be produced at a reduced cost and in a compact form, can be mounted on a circuit board easily and requires a reduced area for mounting.

[0006] According to the present invention, there is provided a duplexer comprising:

a transmission section comprising an isolator and a transmission circuit comprising at least one inductor and capacitors; and  
a reception section comprising a reception filter having a dielectric resonator apparatus;

characterized in that said transmission section has the function of matching said isolator with said reception filter, in that said transmission and reception sections are mounted on a single substrate, and in that

said transmission circuit comprises a trap circuit.

[0007] Preferably said trap circuit comprises a series connected resonance circuit having an inductor and a capacitor.

[0008] Alternatively, said trap circuit comprises a series connected resonance circuit having a dielectric resonator and a capacitor.

[0009] Preferably, said transmission circuit comprises a  $\Pi$ -type low-pass filter having an inductor and capacitors.

[0010] With a duplexer thus formed, fewer components are required because its transmission section includes no dielectric resonators or only one dielectric resonator, and a compact duplexer with a low loss can be realized.

### Brief Description of the Drawings

[0011] The accompanying drawings, which are incorporated in and form a part of this specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention. In the drawings:

Fig. 1 is a circuit diagram of a duplexer embodying this invention;

Fig. 2 is a diagonal external view of the duplexer of Fig. 1 mounted on a substrate;

Fig. 3 is a circuit diagram of another duplexer according to another embodiment of the invention;

Fig. 4 is a schematic diagram showing the general structure of a duplexer; and

Fig. 5 is a circuit diagram of a prior art duplexer.

[0012] Throughout herein, components which are equivalent although belonging to different duplexers are indicated by the same symbols for convenience.

### Detailed Description of the Invention

[0013] As shown in Fig. 1, a duplexer according to this invention has a bandpass filter in its reception section formed with capacitors  $C_7$ ,  $C_8$  and  $C_6$  inserted respectively between two dielectric resonators  $R_3$  and  $R_4$ , between the dielectric resonator  $R_4$  and an output terminal RX, and between the dielectric resonator  $R_3$  and an antenna terminal ANT. In its transmission section, an isolator ISO is connected to an input terminal TX, and a  $\Pi$ -type low-pass filter comprised of an inductor  $L_1$  and capacitors  $C_1$  and  $C_2$  and a series-connected trap circuit comprising an inductor  $L_2$  and a capacitor  $C_3$  are connected between the isolator ISO and the antenna terminal ANT.

[0014] The main function of this  $\Pi$ -type low-pass filter comprised of the inductor  $L_1$  and capacitors  $C_1$  and  $C_2$  and the series-connected trap circuit comprising the inductor  $L_2$  and the capacitor  $C_3$  is to adjust the phase such that the impedance in the passband of the band pass filter at the receiving station becomes an open circuit at the antenna terminal ANT. In other words, the circuit in the transmission section described above is for the purpose of matching the isolator with the reception filter and not for obtaining attenuation inside the passband, at the receiving section.

[0015] In summary, the circuit according to this embodiment of the invention is obtained by replacing the prior art filter circuit using dielectric resonators (as shown in Fig. 5) by a circuit having only inductors and capacitors, and this has become possible because attenuation inside the passband at the receiving station is unnecessary in the case of a duplexer comprising a transmission filter and a reception filter used for a digital portable telephone, etc.

[0016] A duplexer as shown in Fig. 1 is formed according to this invention by mounting the isolator ISO, the dielectric resonators  $R_3$  and  $R_4$ , inductors  $L_1$  and  $L_2$  and capacitors  $C_1 - C_3$  and  $C_6 - C_8$  on a single substrate, as shown in Fig. 2. Grounding electrodes GND are formed as wiring patterns both on the upper and lower surfaces of the substrate (although the bottom surface is not separately illustrated). Similarly, although not shown in Fig. 2, terminals for connections, as well as input and output electrodes are formed also as wiring patterns on the upper and lower surfaces of the substrate.

[0017] In summary, a duplexer according to this embodiment of the invention is characterized as having a simplified circuit in the transmission section and being a unified structure including an isolator. Since the transmission section can thus be formed without using a dielectric resonator and an isolator is included as a part of the unified structure, not only dielectric resonators but also inductors and capacitors which would be required to be connected to such dielectric resonators to form a filter are no longer required. As a result, the total number of components to be assembled (and soldered) is re-

duced and the insertion loss can also be reduced according to this invention.

[0018] Fig. 3 shows another duplexer embodying this invention characterized as having its transmission section formed by connecting an isolator ISO to an input terminal TX and connecting a  $\Pi$ -type low-pass filter comprised of an inductor  $L_1$  and capacitors  $C_1$  and  $C_2$  and a series-connected trap circuit comprising a dielectric resonator  $R_2$  and a capacitor  $C_3$  between the isolator ISO and the antenna terminal ANT. Its reception section is structured as explained above with reference to Fig. 1. In other words, the duplexer shown in Fig. 3 may be described as using the dielectric resonator  $R_2$  in the place of the inductor  $L_2$  of Fig. 1. Thus, the circuit for the transmission section composed of the inductor  $L_1$ , capacitors  $C_1$ ,  $C_2$  and  $C_3$  and the dielectric resonator  $R_2$  is for the purpose of matching the isolator in the transmission section with the receiving circuit at a receiving station.

[0019] As explained above, a duplexer according to the second embodiment of the invention is characterized wherein its transmission section does not have the filtering function obtainable with a plurality of dielectric resonators which were necessary in prior art duplexer for obtaining attenuation. Instead, the transmission section includes only one dielectric resonator, and it is for the purpose of matching. Thus, the transmission section is much simplified as compared to prior art duplexers.

[0020] Although not separately illustrated, a duplexer according to this invention, of which the circuit diagram is shown in Fig. 3, is characterized in that all these components shown in Fig. 3, inclusive of the isolator, are mounted on a single substrate, as shown in Fig. 2. Since use is made of a single substrate and the transmission section includes only one dielectric resonator for matching, the total number of components, as well as the insertion loss, can be reduced also according to this embodiment of this invention.

[0021] Although this invention has been described above in terms of only a limited number of examples, the invention is not intended to be limited by these illustrated examples. Many modifications and variations are possible within the scope of the invention. For example, although the illustrated examples included a two-stage resonator apparatus for the reception section, the circuit for the reception section may be formed with a single-stage dielectric resonator or a multi-stage resonator apparatus with three or more stages. The manner of connecting the resonators is not intended to limit the scope of the invention. As another example, although a plurality of dielectric resonators, each comprising a dielectric block having a throughhole serving as a resonator, are used as a filter for the reception section in the illustrated examples, use may equally well be made of a dielectric resonator apparatus (or dielectric filter) comprising a single dielectric block having a plurality of throughholes serving as resonators. In summary, all such modifications and variations that are obvious to a person skilled

in the art are intended to be within the scope of the invention. Duplexers according to this invention are finally characterized as having a simplified circuit for its transmission section and every component inclusive of an isolator mounted on a single substrate such that they can be easily mounted on a circuit board for an apparatus such as a portable telephone and the cost of the mounting can be reduced. Since the transmission section can be formed without using any dielectric resonator or only one dielectric resonator, furthermore, the total number of the components can be reduced significantly. As a result, the insertion loss is reduced, the duplexer can be made compact and the cost of parts as well as the overall production cost can be significantly reduced.

### Claims

#### 1. A duplexer comprising:

a transmission section comprising an isolator (ISO) and a transmission circuit comprising at least one inductor (L1) and capacitors (C1, C2, C3); and  
a reception section comprising a reception filter having a dielectric resonator apparatus;

characterized in that said transmission section has the function of matching said isolator with said reception filter, in that said transmission and reception sections are mounted on a single substrate, and

in that said transmission circuit comprises a trap circuit.

2. A duplexer according to claim 1, characterized in that said trap circuit comprises a series connected resonance circuit having an inductor (L2) and a capacitor (C3).
3. A duplexer according to claim 1, characterized in that said trap circuit comprises a series connected resonance circuit having a dielectric resonator (R2) and a capacitor (C3).
4. A duplexer according to any one of claims 1 to 3, characterized in that said transmission circuit comprises a  $\pi$ -type low-pass filter having an inductor (L1), and capacitors (C1, C2).

### Patentansprüche

#### 1. Ein Duplexer, mit folgenden Merkmalen:

einem Sendeabschnitt, der einen Isolator (ISO) und eine Sendeschaltung aufweist, die minde-

stens einen Induktor (L1) und Kondensatoren (C1, C2, C3) aufweist; und

einem Empfangsabschnitt, der ein Empfangsfilter mit einer dielektrischen Resonatorvorrichtung aufweist;

dadurch gekennzeichnet, daß der Sendeabschnitt die Funktion des Anpassens des Isolators an das Sendefilter aufweist, und dadurch, daß der Sendeabschnitt und der Empfangsabschnitt an einem einzigen Substrat angebracht sind, und dadurch gekennzeichnet, daß die Sendeschaltung eine Sperrschaltung aufweist.

2. Ein Duplexer gemäß Anspruch 1, dadurch gekennzeichnet, daß die Sperrschaltung eine seriengeschaltete Resonanzschaltung mit einem Induktor (L2) und einem Kondensator (C3) aufweist.
3. Ein Duplexer gemäß Anspruch 1, dadurch gekennzeichnet, daß die Sperrschaltung eine seriengeschaltete Resonanzschaltung mit einem dielektrischen Resonator (R2) und einem Kondensator (C3) aufweist.
4. Ein Duplexer gemäß einem der Ansprüche 1 bis 3, dadurch gekennzeichnet, daß die Sendeschaltung ein  $\pi$ -Typ-Tiefpaßfilter mit einem Induktor (L1) und Kondensatoren (C1, C2) aufweist.

### Revendications

#### 1. Duplexeur comprenant :

une section de transmission comprenant un isolateur (ISO) et un circuit de transmission comprenant au moins une bobine (L1) et des condensateurs (C1, C2, C3) ; et  
une section de réception comprenant un filtre de réception comportant un appareil à résonateur diélectrique ;

caractérisé en ce que ladite section de transmission a pour fonction d'adapter ledit isolateur audit filtre de réception, en ce que lesdites sections de transmission et de réception sont montées sur un substrat unique, et en ce que ledit circuit de transmission comprend un circuit bouchon.

2. Duplexeur selon la revendication 1, caractérisé en ce que ledit circuit bouchon comprend un circuit de résonance connecté en série comportant une bobine (L2) et un condensateur (C3).
3. Duplexeur selon la revendication 1, caractérisé en ce que ledit circuit bouchon comprend un circuit de

résonance connecté en série comportant un résonateur diélectrique (R2) et un condensateur (C3).

4. Duplexeur selon l'une quelconque des revendications 1 à 3, caractérisé en ce que ledit circuit de transmission comprend un filtre passe-bas de type en  $\pi$  comportant une bobine (L1) et des condensateurs (C1, C2).

10

15

20

25

30

35

40

45

50

55

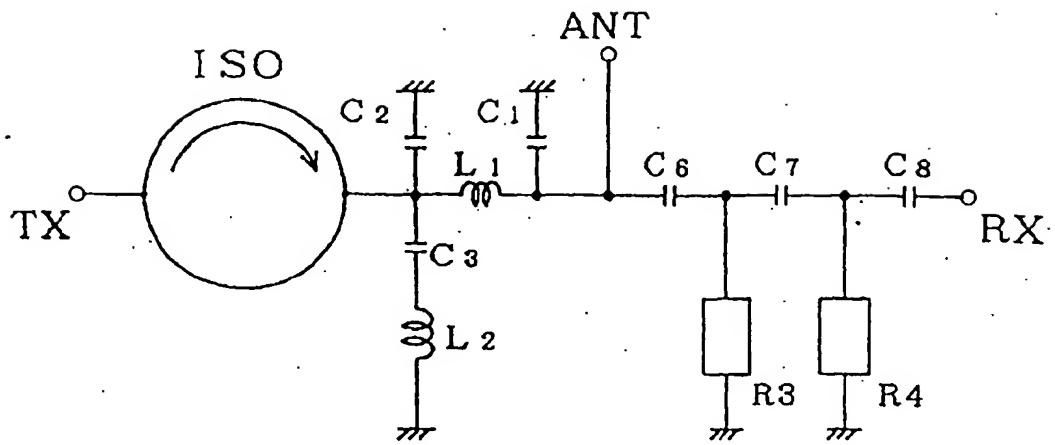


Fig. 1




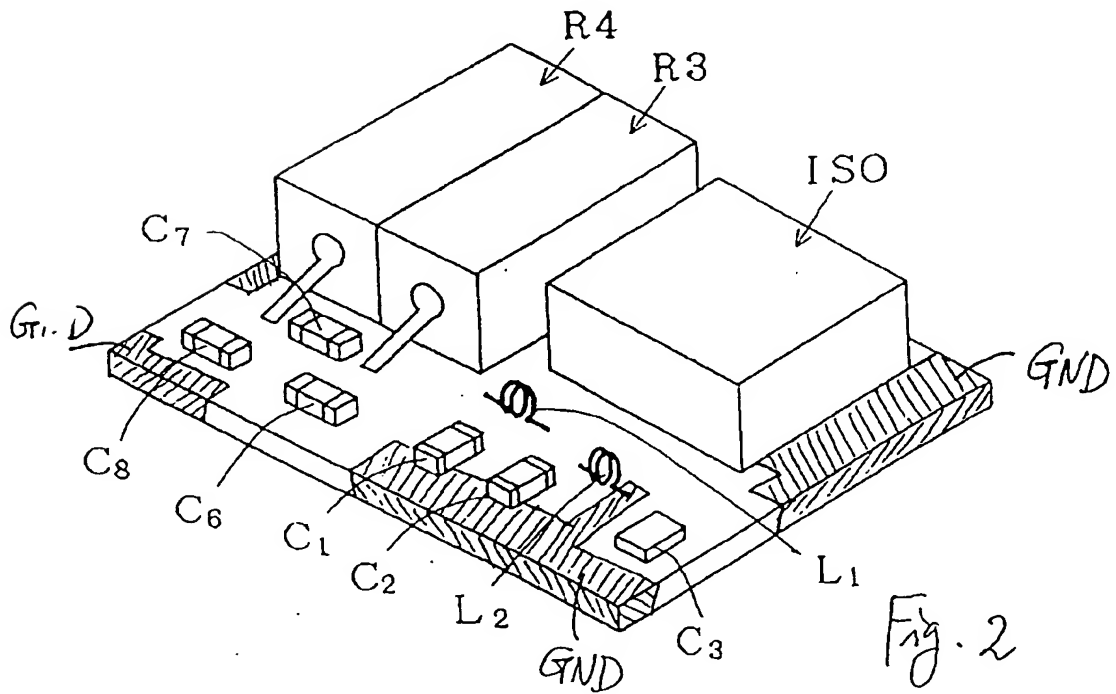


Fig. 2

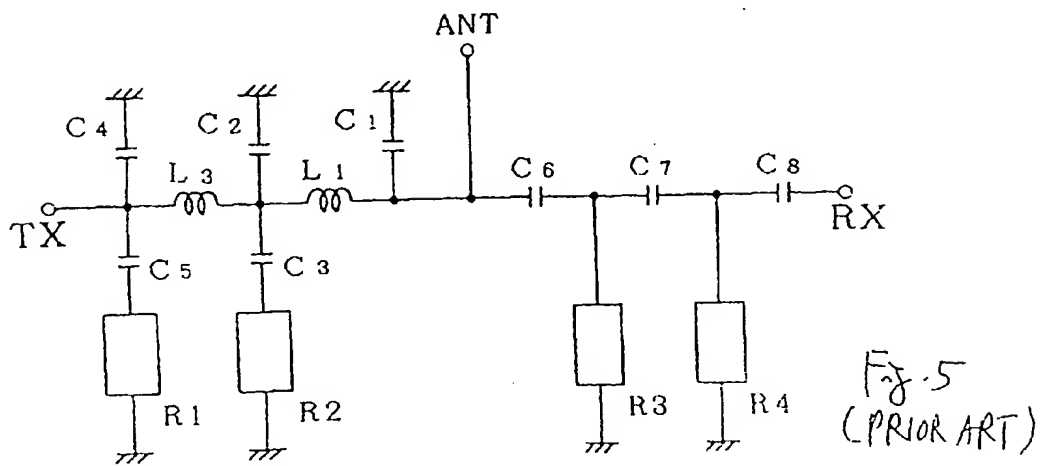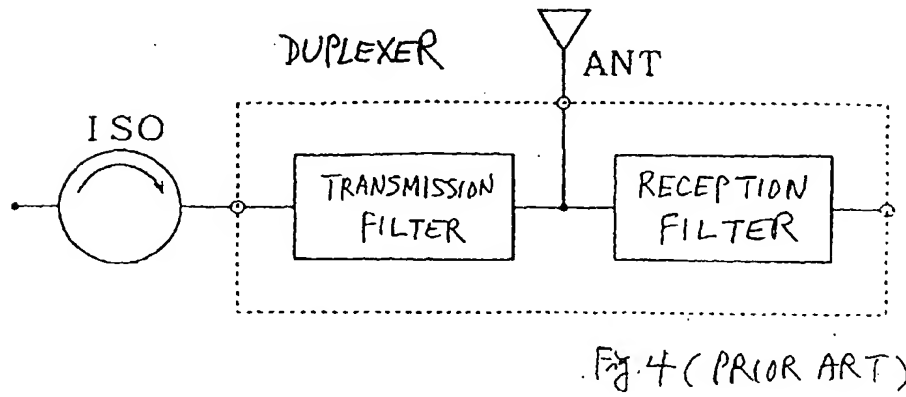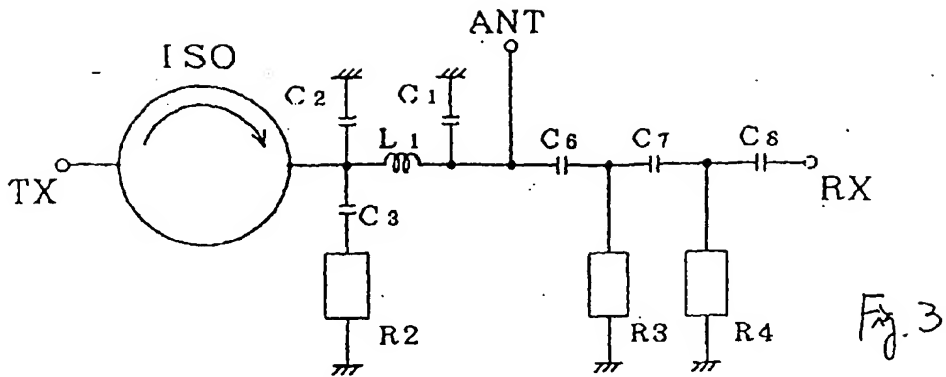

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**